




**BECKER**

# Becker floor and wall shelving

**INFORMATION**

**7-1  
EN**

2015

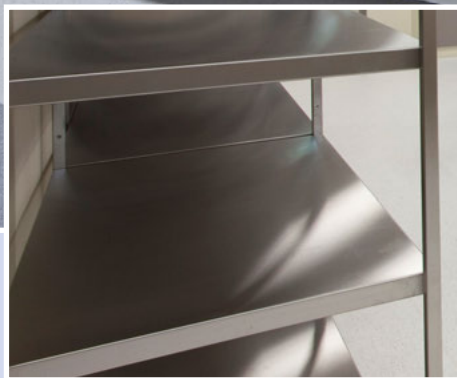

**Becker equipment:**

- for the ward
- for the operating theatre
- for the central sterilisation unit
- for the endoscopy
- for all function rooms

**Material**

Unless otherwise specified, the elements are made of easy to clean and highly hygienic chrome nickel steel AISI 304 (1.4301).

## Becker floor shelving

### Floor standing shelving, standard

with loading capacity up to 150 kg  
for a shelf width of 1000 mm

### Floor standing shelving, reinforced

with loading capacity up to 200 kg  
for a shelf width of 1000 mm

### Becker SB standing shelving system

with varying load capacity depending  
on the type of shelf

All floor standing shelving available with 400, 500 or 600 mm depths and many different widths. Corner solutions, shelf trolleys and special dimensions available upon request.

## Becker wall shelving

**Becker wall-mounted shelving** get top marks for their sturdy wall rails and shelf brackets made of aluminium profiles. You can choose between several materials for your shelves: chrome nickel steel, powder-coated sheet steel or HPL composite board.

*Other storage solutions are described in:*



Register/Brochure 2-1  
Flexible Shelf System



Register/Brochure 3  
Shelf trolley



Register/Brochure 6  
System shelf units for sterile goods



# Chrome nickel steel floor standing shelf units – standard

## Standing shelf units – standard

Every set of shelves consist of a basic shelf unit that can be individually extended by adding extension shelf units. The top and bottom shelves of this basic unit are welded to the two upright frames – all other shelves are bolted to the uprights. The positions of these shelves can be adjusted by height stages of 100 mm.

We can drill mounting holes precisely to your requirements if the shelf units are to be fixed to a wall or joined back-to-back. The standard floor clearance is 150 mm. The level-adjustment feet can compensate any floor unevenness. Please contact us if floor-load distribution plates or individual space arrangement solutions are required.

### Depth: 400 mm

ILLUSTRATION	DESCRIPTION	DIMENSIONS (W x D x H)	ART. NO.
	<b>Basic shelf unit, standard</b> 2 upright frames, 4 shelves, top and bottom shelves welded in place	450 x 400 x 2000 mm	RG 2040 4 045
		500 x 400 x 2000 mm	RG 2040 4 050
		600 x 400 x 2000 mm	RG 2040 4 060
		700 x 400 x 2000 mm	RG 2040 4 070
		800 x 400 x 2000 mm	RG 2040 4 080
		900 x 400 x 2000 mm	RG 2040 4 090
		1000 x 400 x 2000 mm	RG 2040 4 100
		1100 x 400 x 2000 mm	RG 2040 4 110
		1200 x 400 x 2000 mm	RG 2040 4 120
		1300 x 400 x 2000 mm	RG 2040 4 130
		1400 x 400 x 2000 mm	RG 2040 4 140
		1500 x 400 x 2000 mm	RG 2040 4 150
		1600 x 400 x 2000 mm	RG 2040 4 160
	<b>Extension shelf unit standard</b> 1 upright frame, 4 shelves	425 x 400 x 2000 mm	RA 2040 4 045
		475 x 400 x 2000 mm	RA 2040 4 050
		575 x 400 x 2000 mm	RA 2040 4 060
		675 x 400 x 2000 mm	RA 2040 4 070
		775 x 400 x 2000 mm	RA 2040 4 080
		875 x 400 x 2000 mm	RA 2040 4 090
		975 x 400 x 2000 mm	RA 2040 4 100
		1075 x 400 x 2000 mm	RA 2040 4 110
		1175 x 400 x 2000 mm	RA 2040 4 120
		1275 x 400 x 2000 mm	RA 2040 4 130
		1375 x 400 x 2000 mm	RA 2040 4 140
1475 x 400 x 2000 mm	RA 2040 4 150		
1575 x 400 x 2000 mm	RA 2040 4 160		
	<b>Additional shelf</b> (widths stated as nominal dimensions)	450 x 400 x 40 mm	RB 40 045
		500 x 400 x 40 mm	RB 40 050
		600 x 400 x 40 mm	RB 40 060
		700 x 400 x 40 mm	RB 40 070
		800 x 400 x 40 mm	RB 40 080
		900 x 400 x 40 mm	RB 40 090
		1000 x 400 x 40 mm	RB 40 100
		1100 x 400 x 40 mm	RB 40 110
		1200 x 400 x 40 mm	RB 40 120
		1300 x 400 x 40 mm	RB 40 130
		1400 x 400 x 40 mm	RB 40 140
1500 x 400 x 40 mm	RB 40 150		
1600 x 400 x 40 mm	RB 40 160		

# Chrome nickel steel floor standing shelf units – standard



## Materials and finish

- High-grade chrome nickel steel, alloy AISI 304 (1.4301), surface finished to grain 240/320
- Upright frames made of square tube 25 x 25 x 1.5 mm, with plastic feet
- Shelves, material thickness 1.25 mm, 40 mm bent-over edges on all sides, corners welded and ground

## Standard dimensions

Width: 450 – 1600 mm  
 Depth: 400, 500 and 600 mm  
 Height: 2000 mm

## Load-bearing capacity per shelf

450 – 1000 width: approx. 150 kg \*  
 1100 – 1300 mm width: approx. 120 kg \*  
 1400 – 1600 mm width: approx. 100 kg \*  
 (\* when evenly distributed)

### Depth: 500 mm

### Depth: 600 mm

Depth: 500 mm		Depth: 600 mm	
DIMENSIONS (W x D x H)	ART. NO.	DIMENSIONS (W x D x H)	ART. NO.
450 x 500 x 2000 mm	RG 2050 4 045	450 x 600 x 2000 mm	RG 2060 4 045
500 x 500 x 2000 mm	RG 2050 4 050	500 x 600 x 2000 mm	RG 2060 4 050
600 x 500 x 2000 mm	RG 2050 4 060	600 x 600 x 2000 mm	RG 2060 4 060
700 x 500 x 2000 mm	RG 2050 4 070	700 x 600 x 2000 mm	RG 2060 4 070
800 x 500 x 2000 mm	RG 2050 4 080	800 x 600 x 2000 mm	RG 2060 4 080
900 x 500 x 2000 mm	RG 2050 4 090	900 x 600 x 2000 mm	RG 2060 4 090
1000 x 500 x 2000 mm	RG 2050 4 100	1000 x 600 x 2000 mm	RG 2060 4 100
1100 x 500 x 2000 mm	RG 2050 4 110	1100 x 600 x 2000 mm	RG 2060 4 110
1200 x 500 x 2000 mm	RG 2050 4 120	1200 x 600 x 2000 mm	RG 2060 4 120
1300 x 500 x 2000 mm	RG 2050 4 130	1300 x 600 x 2000 mm	RG 2060 4 130
1400 x 500 x 2000 mm	RG 2050 4 140	1400 x 600 x 2000 mm	RG 2060 4 140
1500 x 500 x 2000 mm	RG 2050 4 150	1500 x 600 x 2000 mm	RG 2060 4 150
1600 x 500 x 2000 mm	RG 2050 4 160	1600 x 600 x 2000 mm	RG 2060 4 160
425 x 500 x 2000 mm	RA 2050 4 045	425 x 600 x 2000 mm	RA 2060 4 045
475 x 500 x 2000 mm	RA 2050 4 050	475 x 600 x 2000 mm	RA 2060 4 050
575 x 500 x 2000 mm	RA 2050 4 060	575 x 600 x 2000 mm	RA 2060 4 060
675 x 500 x 2000 mm	RA 2050 4 070	675 x 600 x 2000 mm	RA 2060 4 070
775 x 500 x 2000 mm	RA 2050 4 080	775 x 600 x 2000 mm	RA 2060 4 080
875 x 500 x 2000 mm	RA 2050 4 090	875 x 600 x 2000 mm	RA 2060 4 090
975 x 500 x 2000 mm	RA 2050 4 100	975 x 600 x 2000 mm	RA 2060 4 100
1075 x 500 x 2000 mm	RA 2050 4 110	1075 x 600 x 2000 mm	RA 2060 4 110
1175 x 500 x 2000 mm	RA 2050 4 120	1175 x 600 x 2000 mm	RA 2060 4 120
1275 x 500 x 2000 mm	RA 2050 4 130	1275 x 600 x 2000 mm	RA 2060 4 130
1375 x 500 x 2000 mm	RA 2050 4 140	1375 x 600 x 2000 mm	RA 2060 4 140
1475 x 500 x 2000 mm	RA 2050 4 150	1475 x 600 x 2000 mm	RA 2060 4 150
1575 x 500 x 2000 mm	RA 2050 4 160	1575 x 600 x 2000 mm	RA 2060 4 160
450 x 500 x 40 mm	RB 50 045	450 x 600 x 40 mm	RB 60 045
500 x 500 x 40 mm	RB 50 050	500 x 600 x 40 mm	RB 60 050
600 x 500 x 40 mm	RB 50 060	600 x 600 x 40 mm	RB 60 060
700 x 500 x 40 mm	RB 50 070	700 x 600 x 40 mm	RB 60 070
800 x 500 x 40 mm	RB 50 080	800 x 600 x 40 mm	RB 60 080
900 x 500 x 40 mm	RB 50 090	900 x 600 x 40 mm	RB 60 090
1000 x 500 x 40 mm	RB 50 100	1000 x 600 x 40 mm	RB 60 100
1100 x 500 x 40 mm	RB 50 110	1100 x 600 x 40 mm	RB 60 110
1200 x 500 x 40 mm	RB 50 120	1200 x 600 x 40 mm	RB 60 120
1300 x 500 x 40 mm	RB 50 130	1300 x 600 x 40 mm	RB 60 130
1400 x 500 x 40 mm	RB 50 140	1400 x 600 x 40 mm	RB 60 140
1500 x 500 x 40 mm	RB 50 150	1500 x 600 x 40 mm	RB 60 150
1600 x 500 x 40 mm	RB 50 160	1600 x 600 x 40 mm	RB 60 160



# Chrome nickel steel floor standing shelf units – reinforced

## Standing shelf units – reinforced


Every set of shelves consist of a basic shelf unit that can be individually extended by adding extension shelf units. The top and bottom shelves of this basic unit are welded to the two upright frames – all other shelves are bolted to the uprights. The positions of these shelves can be adjusted by height stages of 100 mm.

We can drill mounting holes precisely to your requirements if the shelf units are to be fixed to a wall or joined back-to-back. The standard floor clearance is 150 mm. The level-adjustment feet can compensate any floor unevenness. Please contact us if floor-load distribution plates or individual space arrangement solutions are required.

**Reinforced standing shelf units** are characterised by a high load-bearing capacity – this is achieved by additional profiles fitted under the shelves.

### Depth: 400 mm

ILLUSTRATION	DESCRIPTION	DIMENSIONS (W x D x H)	ART. NO.
	<b>Basic shelf unit, reinforced</b> 2 upright frames, 4 reinforced shelves, top and bottom shelves welded in place	450 x 400 x 2000 mm	RGV 2040 4 045
		500 x 400 x 2000 mm	RGV 2040 4 050
		600 x 400 x 2000 mm	RGV 2040 4 060
		700 x 400 x 2000 mm	RGV 2040 4 070
		800 x 400 x 2000 mm	RGV 2040 4 080
		900 x 400 x 2000 mm	RGV 2040 4 090
		1000 x 400 x 2000 mm	RGV 2040 4 100
		1100 x 400 x 2000 mm	RGV 2040 4 110
		1200 x 400 x 2000 mm	RGV 2040 4 120
		1300 x 400 x 2000 mm	RGV 2040 4 130
		1400 x 400 x 2000 mm	RGV 2040 4 140
		1500 x 400 x 2000 mm	RGV 2040 4 150
		1600 x 400 x 2000 mm	RGV 2040 4 160
	<b>Extension shelf unit, reinforced</b> 1 upright frame, 4 reinforced shelves	425 x 400 x 2000 mm	RAV 2040 4 045
		475 x 400 x 2000 mm	RAV 2040 4 050
		575 x 400 x 2000 mm	RAV 2040 4 060
		675 x 400 x 2000 mm	RAV 2040 4 070
		775 x 400 x 2000 mm	RAV 2040 4 080
		875 x 400 x 2000 mm	RAV 2040 4 090
		975 x 400 x 2000 mm	RAV 2040 4 100
		1075 x 400 x 2000 mm	RAV 2040 4 110
		1175 x 400 x 2000 mm	RAV 2040 4 120
		1275 x 400 x 2000 mm	RAV 2040 4 130
		1375 x 400 x 2000 mm	RAV 2040 4 140
1475 x 400 x 2000 mm	RAV 2040 4 150		
1575 x 400 x 2000 mm	RAV 2040 4 160		
	additional <b>reinforced shelf</b> (widths stated as nominal dimensions)	450 x 400 x 40 mm	RBV 40 045
		500 x 400 x 40 mm	RBV 40 050
		600 x 400 x 40 mm	RBV 40 060
		700 x 400 x 40 mm	RBV 40 070
		800 x 400 x 40 mm	RBV 40 080
		900 x 400 x 40 mm	RBV 40 090
		1000 x 400 x 40 mm	RBV 40 100
		1100 x 400 x 40 mm	RBV 40 110
		1200 x 400 x 40 mm	RBV 40 120
		1300 x 400 x 40 mm	RBV 40 130
		1400 x 400 x 40 mm	RBV 40 140
1500 x 400 x 40 mm	RBV 40 150		
1600 x 400 x 40 mm	RBV 40 160		

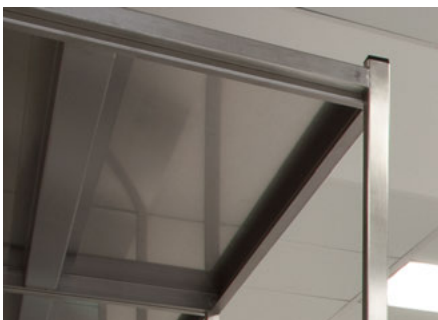



## Materials and finish

- High-grade chrome nickel steel, alloy AISI 304 (1.4301), surface finished to grain 240/320
- Upright frames made of square tube 25 x 25 x 1.5 mm, with plastic feet
- Shelves made of 1.25 mm sheet material, 40 mm bent-over edges on all sides, corners welded and ground, underside reinforced by steel profiles

## Standard dimensions

Width: 450 – 1600 mm  
 Depth: 400, 500 and 600 mm  
 Height: 2000 mm

## Load-bearing capacity per shelf

450 – 1000 width: approx. 200 kg \*  
 1100 – 1300 mm width: approx. 150 kg \*  
 1400 – 1600 mm width: approx. 130 kg \*  
 (\* when evenly distributed)

### Depth: 500 mm

### Depth: 600 mm

Depth: 500 mm		Depth: 600 mm	
DIMENSIONS (W x D x H)	ART. NO.	DIMENSIONS (W x D x H)	ART. NO.
450 x 500 x 2000 mm	RGV 2050 4 045	450 x 600 x 2000 mm	RGV 2060 4 045
500 x 500 x 2000 mm	RGV 2050 4 050	500 x 600 x 2000 mm	RGV 2060 4 050
600 x 500 x 2000 mm	RGV 2050 4 060	600 x 600 x 2000 mm	RGV 2060 4 060
700 x 500 x 2000 mm	RGV 2050 4 070	700 x 600 x 2000 mm	RGV 2060 4 070
800 x 500 x 2000 mm	RGV 2050 4 080	800 x 600 x 2000 mm	RGV 2060 4 080
900 x 500 x 2000 mm	RGV 2050 4 090	900 x 600 x 2000 mm	RGV 2060 4 090
1000 x 500 x 2000 mm	RGV 2050 4 100	1000 x 600 x 2000 mm	RGV 2060 4 100
1100 x 500 x 2000 mm	RGV 2050 4 110	1100 x 600 x 2000 mm	RGV 2060 4 110
1200 x 500 x 2000 mm	RGV 2050 4 120	1200 x 600 x 2000 mm	RGV 2060 4 120
1300 x 500 x 2000 mm	RGV 2050 4 130	1300 x 600 x 2000 mm	RGV 2060 4 130
1400 x 500 x 2000 mm	RGV 2050 4 140	1400 x 600 x 2000 mm	RGV 2060 4 140
1500 x 500 x 2000 mm	RGV 2050 4 150	1500 x 600 x 2000 mm	RGV 2060 4 150
1600 x 500 x 2000 mm	RGV 2050 4 160	1600 x 600 x 2000 mm	RGV 2060 4 160
425 x 500 x 2000 mm	RAV 2050 4 045	425 x 600 x 2000 mm	RAV 2060 4 045
475 x 500 x 2000 mm	RAV 2050 4 050	475 x 600 x 2000 mm	RAV 2060 4 050
575 x 500 x 2000 mm	RAV 2050 4 060	575 x 600 x 2000 mm	RAV 2060 4 060
675 x 500 x 2000 mm	RAV 2050 4 070	675 x 600 x 2000 mm	RAV 2060 4 070
775 x 500 x 2000 mm	RAV 2050 4 080	775 x 600 x 2000 mm	RAV 2060 4 080
875 x 500 x 2000 mm	RAV 2050 4 090	875 x 600 x 2000 mm	RAV 2060 4 090
975 x 500 x 2000 mm	RAV 2050 4 100	975 x 600 x 2000 mm	RAV 2060 4 100
1075 x 500 x 2000 mm	RAV 2050 4 110	1075 x 600 x 2000 mm	RAV 2060 4 110
1175 x 500 x 2000 mm	RAV 2050 4 120	1175 x 600 x 2000 mm	RAV 2060 4 120
1275 x 500 x 2000 mm	RAV 2050 4 130	1275 x 600 x 2000 mm	RAV 2060 4 130
1375 x 500 x 2000 mm	RAV 2050 4 140	1375 x 600 x 2000 mm	RAV 2060 4 140
1475 x 500 x 2000 mm	RAV 2050 4 150	1475 x 600 x 2000 mm	RAV 2060 4 150
1575 x 500 x 2000 mm	RAV 2050 4 160	1575 x 600 x 2000 mm	RAV 2060 4 160
450 x 500 x 40 mm	RBV 50 045	450 x 600 x 40 mm	RBV 60 045
500 x 500 x 40 mm	RBV 50 050	500 x 600 x 40 mm	RBV 60 050
600 x 500 x 40 mm	RBV 50 060	600 x 600 x 40 mm	RBV 60 060
700 x 500 x 40 mm	RBV 50 070	700 x 600 x 40 mm	RBV 60 070
800 x 500 x 40 mm	RBV 50 080	800 x 600 x 40 mm	RBV 60 080
900 x 500 x 40 mm	RBV 50 090	900 x 600 x 40 mm	RBV 60 090
1000 x 500 x 40 mm	RBV 50 100	1000 x 600 x 40 mm	RBV 60 100
1100 x 500 x 40 mm	RBV 50 110	1100 x 600 x 40 mm	RBV 60 110
1200 x 500 x 40 mm	RBV 50 120	1200 x 600 x 40 mm	RBV 60 120
1300 x 500 x 40 mm	RBV 50 130	1300 x 600 x 40 mm	RBV 60 130
1400 x 500 x 40 mm	RBV 50 140	1400 x 600 x 40 mm	RBV 60 140
1500 x 500 x 40 mm	RBV 50 150	1500 x 600 x 40 mm	RBV 60 150
1600 x 500 x 40 mm	RBV 50 160	1600 x 600 x 40 mm	RBV 60 160



# Chrome nickel steel standing shelf system SB



## Becker SB shelf system

This shelf system consists of the upright support, shelf bracing and hinged shelf elements, which must all be bolted together. A shelf unit comprises two upright support, an individually selected number of shelves and suitable shelf bracing. The shelf unit can be extended to create larger shelf storage facilities by adding further system elements as required. Please note: in a storage facility with multiple units, only every second unit needs to be equipped with the corresponding bracing. The system is assembled directly on-site. We can drill mounting holes precisely to your requirements if the shelf units are to be fixed to a wall or joined back-to-back.

The same upright support can be used for both the left-hand and right-hand ends. The positions of the actual shelves can be adjusted by height stages of 100 mm. The level-adjustment feet can compensate any floor unevenness. Please contact us if floor-load distribution plates or individual space arrangement solutions are required.

### Depth: 400 mm

ILLUSTRATION	DESCRIPTION	DIMENSIONS (W x D x H)	ART. NO.
	<b>Upright support</b>	400 x 1800 mm	RS 1840
		400 x 2000 mm	RS 2040
		400 x 2100 mm	RS 2140
	<b>Bracing</b> Bracing must be installed on every individual standing shelf unit and on every second set of shelves in a multi-unit facility.	for shelf width:	
		600 mm	RSP 060
		800 mm	RSP 080
		900 mm	RSP 090
		1000 mm	RSP 100
		1200 mm	RSP 120
	<b>Shelf</b> not reinforced (widths stated as nominal dimensions)	600 x 400 x 40 mm	RS 40 060
		800 x 400 x 40 mm	RS 40 080
		900 x 400 x 40 mm	RS 40 090
		1000 x 400 x 40 mm	RS 40 100
		1200 x 400 x 40 mm	RS 40 120
		1400 x 400 x 40 mm	RS 40 140
	<b>Shelf, reinforced</b> (widths stated as nominal dimensions)	600 x 400 x 40 mm	RSV 40 060
		800 x 400 x 40 mm	RSV 40 080
		900 x 400 x 40 mm	RSV 40 090
		1000 x 400 x 40 mm	RSV 40 100
		1200 x 400 x 40 mm	RSV 40 120
		1400 x 400 x 40 mm	RSV 40 140
	<b>Grid shelf</b> (widths stated as nominal dimensions)	600 x 400 x 43 mm	RSG 40 060
		800 x 400 x 43 mm	RSG 40 080
		900 x 400 x 43 mm	RSG 40 090
		1000 x 400 x 43 mm	RSG 40 100
		1200 x 400 x 43 mm	RSG 40 120
		1400 x 400 x 43 mm	RSG 40 140



## Materials and finish

- High-grade chrome nickel steel, alloy AISI 304 (1.4301), surface finished to grain 240/320
- Upright support made of square tube, 25 x 25 x 1.5 mm, with plastic feet
- Shelf elements in three versions: standard, reinforced and grid shelves

## Standard dimensions

Width: 600, 800, 900, 1000, 1200 and 1400 mm  
 Depth: 400, 500 and 600 mm  
 Height: 1800, 2000 and 2100 mm

## Load-bearing capacity per shelf

widths up to 1200 mm    1400 mm  
 Shelf:                      approx. 120 kg \*    approx. 90 kg \*  
 Shelf, reinforced:    approx. 150 kg \*    approx. 120 kg \*  
 Grid shelf:                approx. 150 kg \*    approx. 100 kg \*  
 (\* when evenly distributed)

### Depth: 500 mm

DIMENSIONS (W x D x H)	ART. NO.	DIMENSIONS (W x D x H)	ART. NO.
500 x 1800 mm	RS 1850	600 x 1800 mm	RS 1860
500 x 2000 mm	RS 2050	600 x 2000 mm	RS 2060
500 x 2100 mm	RS 2150	600 x 2100 mm	RS 2160

### Depth: 600 mm

for shelf width:		for shelf width:	
600 mm	RSP 060	600 mm	RSP 060
800 mm	RSP 080	800 mm	RSP 080
900 mm	RSP 090	900 mm	RSP 090
1000 mm	RSP 100	1000 mm	RSP 100
1200 mm	RSP 120	1200 mm	RSP 120
1400 mm	RSP 140	1400 mm	RSP 140

600 x 500 x 40 mm	RS 50 060	600 x 600 x 40 mm	RS 60 060
800 x 500 x 40 mm	RS 50 080	800 x 600 x 40 mm	RS 60 080
900 x 500 x 40 mm	RS 50 090	900 x 600 x 40 mm	RS 60 090
1000 x 500 x 40 mm	RS 50 100	1000 x 600 x 40 mm	RS 60 100
1200 x 500 x 40 mm	RS 50 120	1200 x 600 x 40 mm	RS 60 120
1400 x 500 x 40 mm	RS 50 140	1400 x 600 x 40 mm	RS 60 140

600 x 500 x 40 mm	RSV 50 060	600 x 600 x 40 mm	RSV 60 060
800 x 500 x 40 mm	RSV 50 080	800 x 600 x 40 mm	RSV 60 080
900 x 500 x 40 mm	RSV 50 090	900 x 600 x 40 mm	RSV 60 090
1000 x 500 x 40 mm	RSV 50 100	1000 x 600 x 40 mm	RSV 60 100
1200 x 500 x 40 mm	RSV 50 120	1200 x 600 x 40 mm	RSV 60 120
1400 x 500 x 40 mm	RSV 50 140	1400 x 600 x 40 mm	RSV 60 140

600 x 500 x 43 mm	RSG 50 060	600 x 600 x 43 mm	RSG 60 060
800 x 500 x 43 mm	RSG 50 080	800 x 600 x 43 mm	RSG 60 080
900 x 500 x 43 mm	RSG 50 090	900 x 600 x 43 mm	RSG 60 090
1000 x 500 x 43 mm	RSG 50 100	1000 x 600 x 43 mm	RSG 60 100
1200 x 500 x 43 mm	RSG 50 120	1200 x 600 x 43 mm	RSG 60 120
1400 x 500 x 43 mm	RSG 50 140	1400 x 600 x 43 mm	RSG 60 140



# Becker wall-mounted shelving



*Example of how to order:*  
 Wall-mounted shelves, 1200 mm x 300 mm,  
 1500 mm high, consisting of:  
 2x RWS 150 – wall rail  
 6x RWK 30 – bracket  
 3x RW3 30 120 – chrome nickel steel shelf,  
 single-walled

## Wall-mounted shelf system

The Becker wall-mounted shelf system consists of several components that can be individual combined to suit your wall spaces and requirements: wall-mounting rails, wall brackets and the actual shelves. These are assembled directly on site. The load-bearing capacity of an individual shelf will depend on the strength of the wall and the distance between the vertical rails. The load per unit area given here when evenly distributed applies for a distance between two wall rails not exceeding 800 mm. From a width of 1800 mm, we recommend the use of 3 wall rails/brackets.

DESCRIPTION	ALU PROFILE	DIMENSIONS	ART. NO.
<b>Wall rail</b>	45 x 19	up to 1000 mm long	RWS 100
	45 x 19	up to 1500 mm long	RWS 150
	45 x 19	up to 2000 mm long	RWS 200
	45 x 19	up to 2500 mm long	RWS 250
<b>Bracket with angle</b>	45 x 19	up to 300 mm long	RWK 30
	45 x 19	up to 400 mm long	RWK 40
	45 x 32	up to 500 mm long	RWK 50
	45 x 32	up to 600 mm long	RWK 60

Shelf	Model series – B – Powder-coated sheet steel, select colour from Becker colour list			
	single-walled		double-walled	
DIMENSIONS (W x D)	ART. NO.	LOAD-BEARING CAPACITY PER SHELF	ART. NO.	LOAD-BEARING CAPACITY PER SHELF
900 x 300 mm	RW1 30 090	120 kg	RW2 30 090	150 kg
1200 x 300 mm	RW1 30 120	120 kg	RW2 30 120	150 kg
1500 x 300 mm	RW1 30 150	120 kg	RW2 30 150	150 kg
1800 x 300 mm	RW1 30 180	120 kg*	RW2 30 180	150 kg*
2000 x 300 mm	RW1 30 200	120 kg*	RW2 30 200	150 kg*
2400 x 300 mm	RW1 30 240	120 kg*	RW2 30 240	150 kg*
900 x 400 mm	RW1 40 090	110 kg	RW2 40 090	110 kg
1200 x 400 mm	RW1 40 120	110 kg	RW2 40 120	110 kg
1500 x 400 mm	RW1 40 150	110 kg	RW2 40 150	110 kg
1800 x 400 mm	RW1 40 180	120 kg*	RW2 40 180	150 kg*
2000 x 400 mm	RW1 40 200	120 kg*	RW2 40 200	150 kg*
2400 x 400 mm	RW1 40 240	120 kg*	RW2 40 240	150 kg*
900 x 500 mm	RW1 50 090	90 kg	RW2 50 090	90 kg
1200 x 500 mm	RW1 50 120	90 kg	RW2 50 120	90 kg
1500 x 500 mm	RW1 50 150	90 kg	RW2 50 150	90 kg
1800 x 500 mm	RW1 50 180	120 kg*	RW2 50 180	135 kg*
2000 x 500 mm	RW1 50 200	120 kg*	RW2 50 200	135 kg*
2400 x 500 mm	RW1 50 240	120 kg*	RW2 50 240	135 kg*
900 x 600 mm	RW1 60 090	75 kg	RW2 60 090	75 kg
1200 x 600 mm	RW1 60 120	75 kg	RW2 60 120	75 kg
1500 x 600 mm	RW1 60 150	75 kg	RW2 60 150	75 kg
1800 x 600 mm	RW1 60 180	110 kg*	RW2 60 180	110 kg*
2000 x 600 mm	RW1 60 200	110 kg*	RW2 60 200	110 kg*
2400 x 600 mm	RW1 60 240	110 kg*	RW2 60 240	110 kg*

## Wall rails and brackets

- made of robust 45x19 mm or 45x32 mm aluminium profiles, neutrally anodised
- vertical bracket position continuously adjustable
- groove-and-key locking system
- plastic end caps
- fastening material included

## Standard dimensions

Maximum single shelf width: 2400 mm  
 Depth: 300, 400, 500 and 600 mm  
 Height: max. 2500 mm

## Shelves

- RW1** — Powder-coated sheet steel, single-walled, 20 mm thick, bent-over edges on all sides, material thickness 1.0 mm, select colour from Becker colour list
- RW2** — Powder-coated sheet steel, double-walled, 20 mm thick, sound-dampened, material thickness 1.0 mm, select colour from Becker colour list
- RW3** — Chrome nickel steel, single-walled, 20 mm thick, bent-over edges on all sides, material thickness 1.0 mm
- RW4** — Chrome nickel steel, double-walled, 20 mm thick, sound-dampened, material thickness 1.0 mm
- RW7** — High-pressure laminated material, white, 19 mm thick, chipboard body, upper and lower side with white laminated plastic, all four edges with 1 mm ABS edge veneer

HPL solid core shelves upon special request



**Our product range is very extensive – please ask for special wall mounted solutions**

Model series – V – Chrome nickel steel				High pressure laminated material, white	
single-walled		double-walled			
ART. NO.	LOAD-BEARING CAPACITY PER SHELF	ART. NO.	LOAD-BEARING CAPACITY PER SHELF	ART. NO.	LOAD-BEARING CAPACITY PER SHELF
RW3 30 090	120 kg	RW4 30 090	150 kg	RW7 30 090	50 kg
RW3 30 120	120 kg	RW4 30 120	150 kg	RW7 30 120	50 kg
RW3 30 150	120 kg	RW4 30 150	150 kg	RW7 30 150	50 kg
RW3 30 180	120 kg*	RW4 30 180	150 kg*	RW7 30 180	50 kg*
RW3 30 200	120 kg*	RW4 30 200	150 kg*	RW7 30 200	50 kg*
RW3 30 240	120 kg*	RW4 30 240	150 kg*	RW7 30 240	50 kg*
RW3 40 090	110 kg	RW4 40 090	110 kg	RW7 40 090	50 kg
RW3 40 120	110 kg	RW4 40 120	110 kg	RW7 40 120	50 kg
RW3 40 150	110 kg	RW4 40 150	110 kg	RW7 40 150	50 kg
RW3 40 180	120 kg*	RW4 40 180	150 kg*	RW7 40 180	50 kg*
RW3 40 200	120 kg*	RW4 40 200	150 kg*	RW7 40 200	50 kg*
RW3 40 240	120 kg*	RW4 40 240	150 kg*	RW7 40 240	50 kg*
RW3 50 090	90 kg	RW4 50 090	90 kg	RW7 50 090	50 kg
RW3 50 120	90 kg	RW4 50 120	90 kg	RW7 50 120	50 kg
RW3 50 150	90 kg	RW4 50 150	90 kg	RW7 50 150	50 kg
RW3 50 180	120 kg*	RW4 50 180	135 kg*	RW7 50 180	50 kg*
RW3 50 200	120 kg*	RW4 50 200	135 kg*	RW7 50 200	50 kg*
RW3 50 240	120 kg*	RW4 50 240	135 kg*	RW7 50 240	50 kg*
RW3 60 090	75 kg	RW4 60 090	75 kg	RW7 60 090	50 kg
RW3 60 120	75 kg	RW4 60 120	75 kg	RW7 60 120	50 kg
RW3 60 150	75 kg	RW4 60 150	75 kg	RW7 60 150	50 kg
RW3 60 180	110 kg*	RW4 60 180	110 kg*	RW7 60 180	50 kg*
RW3 60 200	110 kg*	RW4 60 200	110 kg*	RW7 60 200	50 kg*
RW3 60 240	110 kg*	RW4 60 240	110 kg*	RW7 60 240	50 kg*

# BECKER



For decades Becker quality steel furniture and equipment have been a fixed item in medical technology in clinics and hospitals.

Design, individual choice of colours as well as an extensive range of items and sizes allow you to make optimum use of your available space. The resulting concept is customized to your needs and logical through and through.



Metallwarenfabrik  
Walter H. Becker GmbH  
Anzenkirchener Strasse 4  
84371 Triftern, Germany

Phone +49(0)8562 9605-0  
Fax +49(0)8562 9605-64  
info@becker-triftern.de  
www.becker-triftern.de

### Becker equipment:

- for the ward
- for the operating theatre
- for the central sterilisation unit
- for the endoscopy
- for all function rooms